



投标单位	日期								
无锡驰泓建筑工程有限公司	2025/2/4								
行标签	求和项:人工费(不含税):B	求和项:主材费(不含税):C	求和项:机械辅材费(不含税):D	求和项:综合取费(不含税)(%):E	求和项:不含税单价:F=(B+C+D)×(1+E/100)	求和项:不含税合价:G=A×F	求和项:税率(%):H	求和项:含税合价:J	
22	2094.2	1132.69	5174.34	355.00	8,821.23	49,153.74	839.00	53,877.57	
22-1001北房间北外墙漏水	314.32	161.02	738.6	50.00	1,274.63	3,092.66	90.00	3,370.99	
窗口打胶	95.13	65.32	12.41	5.00	181.50	0.00	9.00	0.00	
窗口原密封胶铲除,重新打硅宝结构耐候胶	95.13	65.32	12.41	5.00	181.50	0.00	9.00	0.00	
堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04	
采用YH东方雨虹对缝堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04	
接缝处打胶	11.65	14.51	4.21	5.00	31.89	197.72	9.00	215.51	
对窗台与外墙面接缝处,原密封胶铲除,重新打硅宝	11.65	14.51	4.21	5.00	31.89	197.72	9.00	215.51	
垃圾清理	13.16		3.52	5.00	17.51	87.55	9.00	95.43	
人工清理建筑垃圾并装袋,垂直运输短驳	13.16		3.52	5.00	17.51	87.55	9.00	95.43	
垃圾装车外运	31.25		700	5.00	767.81	767.81	9.00	836.91	
自卸汽车运土(8t以内)(运距25km以内)	31.25		700	5.00	767.81	767.81	9.00	836.91	
砂浆抹面找平	14.36	8.25	2.13	5.00	25.98	241.61	9.00	263.35	
采用立邦抗裂防水砂浆,对墙面进行找平	14.36	8.25	2.13	5.00	25.98	241.61	9.00	263.35	
涂刷防水涂料2遍	19.86	11.76	2.13	5.00	35.44	659.18	9.00	718.51	
涂刷东方雨虹HCA-108屋面外墙高弹性防水涂料1.5mm	19.86	11.76	2.13	5.00	35.44	659.18	9.00	718.51	
涂刷界面剂	4.77	7.65	1.26	5.00	14.36	222.58	9.00	242.61	
提高界面处理剂	4.77	7.65	1.26	5.00	14.36	222.58	9.00	242.61	
外墙表面铲除清理	14.73		2.43	5.00	18.02	279.31	9.00	304.45	
对原墙面落灰、起皮的地方进行铲除	14.73		2.43	5.00	18.02	279.31	9.00	304.45	
外墙涂料	12.13	8.16	1.97	5.00	23.37	478.15	9.00	521.18	
外墙溶剂涂料一底二面	12.13	8.16	1.97	5.00	23.37	478.15	9.00	521.18	
22-1001北书房北外墙漏水	314.32	161.02	738.6	50.00	1,274.63	2,958.57	90.00	3,224.85	
窗口打胶	95.13	65.32	12.41	5.00	181.50	0.00	9.00	0.00	
窗口原密封胶铲除,重新打硅宝结构耐候胶	95.13	65.32	12.41	5.00	181.50	0.00	9.00	0.00	
堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04	
采用YH东方雨虹对缝堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04	
接缝处打胶	11.65	14.51	4.21	5.00	31.89	184.96	9.00	201.61	
对窗台与外墙面接缝处,原密封胶铲除,重新打硅宝	11.65	14.51	4.21	5.00	31.89	184.96	9.00	201.61	
垃圾清理	13.16		3.52	5.00	17.51	87.55	9.00	95.43	
人工清理建筑垃圾并装袋,垂直运输短驳	13.16		3.52	5.00	17.51	87.55	9.00	95.43	
垃圾装车外运	31.25		700	5.00	767.81	767.81	9.00	836.91	
自卸汽车运土(8t以内)(运距25km以内)	31.25		700	5.00	767.81	767.81	9.00	836.91	
砂浆抹面找平	14.36	8.25	2.13	5.00	25.98	224.00	9.00	246.37	
采用立邦抗裂防水砂浆,对墙面进行找平	14.36	8.25	2.13	5.00	25.98	224.00	9.00	246.37	
涂刷防水涂料2遍	19.86	11.76	2.13	5.00	35.44	618.66	9.00	672.16	
涂刷东方雨虹HCA-108屋面外墙高弹性防水涂料1.5mm	19.86	11.76	2.13	5.00	35.44	618.66	9.00	672.16	
涂刷界面剂	4.77	7.65	1.26	5.00	14.36	208.22	9.00	226.96	
提高界面处理剂	4.77	7.65	1.26	5.00	14.36	208.22	9.00	226.96	
外墙表面铲除清理	14.73		2.43	5.00	18.02	261.29	9.00	284.81	
对原墙面落灰、起皮的地方进行铲除	14.73		2.43	5.00	18.02	261.29	9.00	284.81	
外墙涂料	12.13	8.16	1.97	5.00	23.37	447.30	9.00	487.56	
外墙溶剂涂料一底二面	12.13	8.16	1.97	5.00	23.37	447.30	9.00	487.56	
22-1001南房间南外墙漏水	314.32	161.02	738.6	50.00	1,274.63	3,892.99	90.00	4,026.45	
窗口打胶	95.13	65.32	12.41	5.00	181.50	181.50	9.00	197.84	

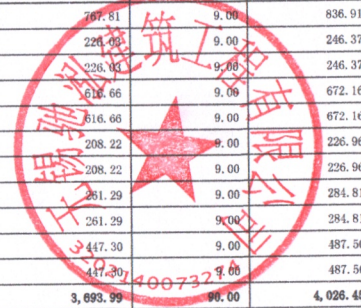

窗口原密封胶铲除,重新打硅宝结构耐候胶	95.13	66.32	12.41	5.00	181.50	181.50	9.00	197.84
堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04
采用YH东方雨虹对缝隙堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04
接缝处打胶	11.65	14.51	4.21	5.00	31.89	235.99	9.00	257.23
对窗台与外墙面接缝处,原密封胶铲除,重新打硅宝	11.65	14.51	4.21	5.00	31.89	235.99	9.00	257.23
垃圾清理	13.16		3.52	5.00	17.51	105.06	9.00	114.52
人工清理建筑垃圾并装袋,垂直运输短驳	13.16		3.52	5.00	17.51	105.06	9.00	114.52
垃圾装车外运	31.25		700	5.00	767.81	767.81	9.00	836.91
自卸汽车运土(8t以内)(运距25km以内)	31.25		700	5.00	767.81	767.81	9.00	836.91
砂浆抹面找平	14.36	8.25	2.13	5.00	25.98	288.38	9.00	314.33
采用立邦抗裂防水砂浆,对墙面进行找平	14.36	8.25	2.13	5.00	25.98	288.38	9.00	314.33
涂刷防水涂料2遍	19.86	11.76	2.13	5.00	35.44	786.77	9.00	857.58
涂刷东方雨虹HKA-108屋面外墙高弹性防水涂料1.5mm	19.86	11.76	2.13	5.00	35.44	786.77	9.00	857.58
涂刷界面剂	4.77	7.65	1.26	5.00	14.36	265.66	9.00	289.57
提高界面处理剂	4.77	7.65	1.26	5.00	14.36	265.66	9.00	289.57
外墙表面铲除清理	14.73		2.43	5.00	18.02	333.37	9.00	363.37
对原墙面落灰、起皮的地方进行铲除	14.73		2.43	5.00	18.02	333.37	9.00	363.37
外墙涂料	12.13	8.16	1.97	5.00	23.37	570.70	9.00	622.06
外墙溶剂涂料一底二面	12.13	8.16	1.97	5.00	23.37	570.70	9.00	622.06
22-1301南主卧室飘窗南外墙	314.32	161.02	738.6	50.00	1,274.63	3,741.38	90.00	4,078.11
窗口打胶	95.13	66.32	12.41	5.00	181.50	363.00	9.00	395.67
窗口原密封胶铲除,重新打硅宝结构耐候胶	95.13	66.32	12.41	5.00	181.50	363.00	9.00	395.67
堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04
采用YH东方雨虹对缝隙堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04
接缝处打胶	11.65	14.51	4.21	5.00	31.89	223.23	9.00	243.32
对窗台与外墙面接缝处,原密封胶铲除,重新打硅宝	11.65	14.51	4.21	5.00	31.89	223.23	9.00	243.32
垃圾清理	13.16		3.52	5.00	17.51	105.06	9.00	114.52
人工清理建筑垃圾并装袋,垂直运输短驳	13.16		3.52	5.00	17.51	105.06	9.00	114.52
垃圾装车外运	31.25		700	5.00	767.81	767.81	9.00	836.91
自卸汽车运土(8t以内)(运距25km以内)	31.25		700	5.00	767.81	767.81	9.00	836.91
砂浆抹面找平	14.36	8.25	2.13	5.00	25.98	272.79	9.00	297.34
采用立邦抗裂防水砂浆,对墙面进行找平	14.36	8.25	2.13	5.00	25.98	272.79	9.00	297.34
涂刷防水涂料2遍	19.86	11.76	2.13	5.00	35.44	744.24	9.00	811.22
涂刷东方雨虹HKA-108屋面外墙高弹性防水涂料1.5mm	19.86	11.76	2.13	5.00	35.44	744.24	9.00	811.22
涂刷界面剂	4.77	7.65	1.26	5.00	14.36	251.30	9.00	273.92
提高界面处理剂	4.77	7.65	1.26	5.00	14.36	251.30	9.00	273.92
外墙表面铲除清理	14.73		2.43	5.00	18.02	315.35	9.00	343.73
对原墙面落灰、起皮的地方进行铲除	14.73		2.43	5.00	18.02	315.35	9.00	343.73
外墙涂料	12.13	8.16	1.97	5.00	23.37	539.85	9.00	588.44
外墙溶剂涂料一底二面	12.13	8.16	1.97	5.00	23.37	539.85	9.00	588.44
22-1601北面室外墙漏水	314.32	161.02	738.6	50.00	1,274.63	3,334.93	90.00	3,635.07
窗口打胶	95.13	66.32	12.41	5.00	181.50	363.00	9.00	395.67
窗口原密封胶铲除,重新打硅宝结构耐候胶	95.13	66.32	12.41	5.00	181.50	363.00	9.00	395.67
堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04
采用YH东方雨虹对缝隙堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04
接缝处打胶	11.65	14.51	4.21	5.00	31.89	186.24	9.00	203.00
对窗台与外墙面接缝处,原密封胶铲除,重新打硅宝	11.65	14.51	4.21	5.00	31.89	186.24	9.00	203.00
垃圾清理	13.16		3.52	5.00	17.51	87.55	9.00	95.43
人工清理建筑垃圾并装袋,垂直运输短驳	13.16		3.52	5.00	17.51	87.55	9.00	95.43



垃圾装车外运	31.25		700	5.00	767.81	767.81	9.00	836.91
自卸汽车运土(8t以内)(运距25km以内)	31.25		700	5.00	767.81	767.81	9.00	836.91
砂浆抹面找平	14.36	8.25	2.13	5.00	25.98	227.58	9.00	248.06
采用立邦抗裂防水砂浆,对墙面进行找平	14.36	8.25	2.13	5.00	25.98	227.58	9.00	248.06
涂刷防水涂料2遍	19.86	11.76	2.13	5.00	35.44	620.91	9.00	676.79
涂刷东方雨虹HKA-108屋面外墙高弹性防水涂料1.5m	19.86	11.76	2.13	5.00	35.44	620.91	9.00	676.79
涂刷界面剂	4.77	7.65	1.26	5.00	14.36	209.66	9.00	228.53
檐高界面处理剂	4.77	7.65	1.26	5.00	14.36	209.66	9.00	228.53
外墙表面铲除清理	14.73		2.43	5.00	18.02	263.09	9.00	286.77
对原墙面落灰、起皮的地方进行铲除	14.73		2.43	5.00	18.02	263.09	9.00	286.77
外墙涂料	12.13	8.16	1.97	5.00	23.37	450.34	9.00	490.87
外墙溶剂涂料一底二面	12.13	8.16	1.97	5.00	23.37	450.34	9.00	490.87
22-1802卧室西南角渗漏	114.32	161.02	738.6	50.00	1,274.63	1,925.72	90.00	2,099.03
窗口打胶	95.13	65.32	12.41	5.00	181.50	0.00	9.00	0.00
窗口原密封胶铲除,重新打硅宝结构耐候胶	95.13	65.32	12.41	5.00	181.50	0.00	9.00	0.00
堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04
采用YH东方雨虹对缝堵漏	97.28	45.37	8.54	5.00	158.75	158.75	9.00	173.04
接缝处打胶	11.65	14.51	4.21	5.00	31.89	146.69	9.00	159.89
对窗台与外墙接缝处,原密封胶铲除,重新打硅宝	11.65	14.51	4.21	5.00	31.89	146.69	9.00	159.89
垃圾清理	13.16		3.52	5.00	17.51	35.02	9.00	38.17
人工清理建筑垃圾并装袋,垂直运输短驳	13.16		3.52	5.00	17.51	35.02	9.00	38.17
垃圾装车外运	31.25		700	5.00	767.81	767.81	9.00	836.91
自卸汽车运土(8t以内)(运距25km以内)	31.25		700	5.00	767.81	767.81	9.00	836.91
砂浆抹面找平	14.36	8.25	2.13	5.00	25.98	119.51	9.00	130.27
采用立邦抗裂防水砂浆,对墙面进行找平	14.36	8.25	2.13	5.00	25.98	119.51	9.00	130.27
涂刷防水涂料2遍	19.86	11.76	2.13	5.00	35.44	280.68	9.00	305.91
涂刷东方雨虹HKA-108屋面外墙高弹性防水涂料1.5m	19.86	11.76	2.13	5.00	35.44	280.68	9.00	305.94
涂刷界面剂	4.77	7.65	1.26	5.00	14.36	94.78	9.00	103.31
檐高界面处理剂	4.77	7.65	1.26	5.00	14.36	94.78	9.00	103.31
外墙表面铲除清理	14.73		2.43	5.00	18.02	118.93	9.00	129.63
对原墙面落灰、起皮的地方进行铲除	14.73		2.43	5.00	18.02	118.93	9.00	129.63
外墙涂料	12.13	8.16	1.97	5.00	23.37	203.55	9.00	221.87
外墙溶剂涂料一底二面	12.13	8.16	1.97	5.00	23.37	203.55	9.00	221.87
22-902东墙保温层脱落	208.28	166.57	742.74	55.00	1,173.45	30,406.49	99.00	33,143.07
安装保温板	20.17	28.52	8.12	5.00	59.65	3,877.25	9.00	4,226.20
安装5cm厚高密度聚苯乙烯挤塑板	20.17	28.52	8.12	5.00	59.65	3,877.25	9.00	4,226.20
底层抹灰	12.31	16.82	2.75	5.00	33.47	2,175.55	9.00	2,371.35
抗裂砂浆找平	12.31	16.82	2.75	5.00	33.47	2,175.55	9.00	2,371.35
挂玻纤网	11.15	4.58	0.86	5.00	17.42	1,245.53	9.00	1,357.63
3*3mm高密度玻璃纤维网	11.15	4.58	0.86	5.00	17.42	1,245.53	9.00	1,357.63
垃圾清理	13.16		3.52	5.00	17.51	525.30	9.00	572.58
人工清理建筑垃圾并装袋,垂直运输短驳	13.16		3.52	5.00	17.51	525.30	9.00	572.58
垃圾外运	31.25		700	5.00	767.81	3,071.24	9.00	3,347.65
自卸汽车运土(8t以内)(运距25km以内)	31.25		700	5.00	767.81	3,071.24	9.00	3,347.65
批腻子2遍	22.15	28.71	3.84	5.00	57.44	4,312.60	9.00	4,700.73
立邦外墙专用腻子	22.15	28.71	3.84	5.00	57.44	4,312.60	9.00	4,700.73
刷抗裂砂浆2遍	22.15	27.86	3.45	5.00	56.13	3,648.45	9.00	3,976.81
刷立邦抗裂防水砂浆2遍	22.15	27.86	3.45	5.00	56.13	3,648.45	9.00	3,976.81
刷墙固	11.17	15.45	3.25	5.00	31.36	2,242.24	9.00	2,444.04

涂刷表面处理剂	11.17	15.45	3.25	5.00	31.36	2,242.24	9.00	2,444.04
刷外墙涂料	8.56	12.16	1.97	5.00	23.82	1,788.41	9.00	1,949.37
外墙溶剂涂料一底二面	8.56	12.16	1.97	5.00	23.82	1,788.41	9.00	1,949.37
涂刷防水涂料2遍	25.65	32.47	7.13	5.00	68.51	4,898.47	9.00	5,339.33
涂刷丙烯酸防水涂料2遍	25.65	32.47	7.13	5.00	68.51	4,898.47	9.00	5,339.33
外墙打开保温层	30.56		7.85	5.00	40.33	2,621.45	9.00	2,857.38
蜜蜂人高空对外墙面及保温层拆除	30.56		7.85	5.00	40.33	2,621.45	9.00	2,857.38

